



中国认可
国际互认
检测
TESTING
CNAS L0916

Report No. 2021AF1382

TYPE-EXAMINATION REPORT OF SPECIAL EQUIPMENT (LIFT)

Product category Lift Safety Protection Device

Equipment Type Lift Ascending Car Overspeed Protection Means
(speed reducing element)

Product name Traction machine brake

Model/Type BLS

Manufacturer SHENYANG BLUELIGHT DRIVE TECHNOLOGY CO., LTD.

Applicant SHENYANG BLUELIGHT DRIVE TECHNOLOGY CO., LTD.

SHENZHEN INSTITUTE OF QUALITY & SAFETY INSPECTION AND RESEARCH
GUANGDONG STATION OF ELEVATOR QUALITY SUPERVISION AND TEST (SHENZHEN)



Notes

1.This report is obtained based in the type-examination compliance with Regulation for Type Tests of Elevators (2016)(TSG T7007-2016,Including No.1 amending list)

2.This report must be printed or filled out in fountain pens/sign pens with neat and clear handwriting, no alternation.

3.The report is invalid if not signed by signature, and it is also invalid without approval number of the type testing body, special seal for report and paging seal.

4. There will be two versions of the report: electronic and printed formats. They are equal in authorities.

5.Any discrepancy about the report from applicant should be raised within 15 working days after receiving the report.

6. According to the provisions of Regulation for Type Tests of Elevators (2016)(TSG T7007-2016,Including No.1 amending list), the name or logo of the type test body shall be marked on the product nameplate of the main parts and safety parts of the elevator. The name of our type test organization is "Shenzhen Institute of Quality & Safety Inspection and Research", and the logo is "SIQS".

7. The report is responsible for the tested sample only.

Name of Institution: Shenzhen Institute of Quality & Safety Inspection and Research

Address of Institution: Agricultural Science and Technology Building, No. 1085, south of ChaGuang Road, XiLi street, NanShan District, Shenzhen, Guangdong Province ,China

Office Address of Type Test Body: TeJian Building,1032 HongGang Road, Luohu District, Shenzhen, Guangdong Province ,China

Approval No. TS7610038-2025

Postcode: 518029

Branch Name of Type Test Body: LongHua QingHu Branch of Shenzhen Institute of Quality & Safety Inspection and Research

Branch Address of Type Test Body: 50 QingCui Road, QingHu, LongHua Block, LongHua District, Shenzhen, Guangdong Province ,China

Postcode: 518109

Phone: 0755 28079821 0755 28079351

Website : www.sise.org.cn Email: szlift@sise.org.cn



CONTENTS

Conclusive report of the Type-Test	Page 1
1. Sample Configuration and Technical Data	Page 2
2. Technical Documents Review	Page 2
3. Sample Check and Testing	Page 3
4. Changes of the Type-Examination Report	Page 10



TYPE-EXAMINATION REPORT of
SPECIAL EQUIPMENT
(LIFT)

Report No. 2021AF1382

Page 1 of 10

Equipment Name	Lift Ascending Car Overspeed Protection Means (speed reducing element)		
Product Name	Traction machine brake	Product Model	BLS
Product No.	S19C0556	Manufacture Date	Nov-2021
Name of Applicant	SHENYANG BLUELIGHT DRIVE TECHNOLOGY CO., LTD.	unified social credit identifier	91210112715754447D
Registered Address of Applicant	NO.37, XINSHIJI ROAD, HUNNAN NEW DISTRICT, SHENYANG, CHINA		
Manufacturer	SHENYANG BLUELIGHT DRIVE TECHNOLOGY CO., LTD.		
Manufacturing Address	NO.37, XINSHIJI ROAD, HUNNAN NEW DISTRICT, SHENYANG, CHINA		
Type of Examination	Consistency Verification	Inspection Date	13-Dec-2021
Sample No.	20211124	Sample Status	Normal
Inspection Place	LongHua QingHu Branch of Shenzhen Institute of Quality & Safety Inspection and Research		
Inspection Condition	Temperature: 20 °C; Humidity: 50 %RH		
Standard for Inspection	《Regulation for Type Test of Lifts》 (TSG T7007-2016 ,Including No.1 amending list) GB 7588 – 2003 Safety Rules for the Construction and Installation of Electric Lifts (Including No.1 amending list) EN 81-20:2014 Safety rules for the construction and installation of lifts - Lifts for the transport of persons and goods - Part 20: Passenger and goods passenger lifts EN 81-50:2014 Safety rules for the construction and installation of lifts -Examinations and tests - Part 50: Design rules, calculations, examinations and tests of lift components		
Conclusion	Passed		
Note	Document ID No. XPSQ2021100040AZNBG.		
Inspected by: 肖羽扶	Date: 14-Dec-2021	Agency Approval Number: TS7610038-2025 (Stamp) Issued Date: 14-Dec-2021	
Reviewed by: 陈.桂洲	Date: 14-Dec-2021		
Approved by: 张怀继	Date: 14-Dec-2021		



1. Sample configuration and technical data

Equipment Name		Lift ascending car overspeed protection means (speed reducing element)		
Product Name		Traction machine brake	Model/Type	BLS
Working condition		Indoor	Explosive-proof type	Not applicable
No-load system mass range		900 kg-4800 kg	Rated load range	320 kg-1275 kg
Type of action Part		Traction machine brake	Car-side Mass Range	386 kg-2081 kg
Range of Balance Factor		0.4-0.5	Suspension Ratio	2:1
Tripping Speed Range of braked part		1.16 m/s-5.26 m/s	Using of Balance Chain or Rope	Yes
Overspeed Monitoring device	Name	Overspeed governor	Model	/
	Rated speed range	0.50 m/s-2.0 m/s	Triggering speed range	0.58 m/s-2.63 m/s
Traction machine brake	Type	BLS	Structure Type	Complete electromagnetic disc
	Action part	Traction Sheave Shaft	Quantity	2
	Friction element material	Non-asbestos rubber carbon fiber	Triggering Mode	Electric Trigger
	Elastic element type	Cylindrical helical compression spring		
<p>Note 1: "Car-side Mass Range" means the sum of no-load car mass and the extra mass of in the car side; Extra mass refers to the total of the mass of trailing cable, suspension cable and possibly that of the compensation cable or chain.</p>				

2. Technical documents check and results

No.	Item No.	Items	Results	Conclusions
1	Q5.1	Certificate and related technical documents	Completed	Passed
2	Q5.2	Technical data	Completed	Passed
3	Q5.3	Main design drawing	Completed	Passed



3. Sample check and test

1. Test item and results

No.	item code and name	item contents and requirements	Results	Conclusion
1	Q6.1 Action Part	Speed reducing element shall act: (1) to the car; or (2) to the counterweight; or (3) on the rope system(suspension or compensating); or (4) traction sheave (e.g.on the traction sheave directly or on the same shaft in the immediate vicinity of the sheave) Note: Instantaneous safety gear cannot be used as speed reducing element of Ascending Car Overspeed Protection Means.	Action part: <u>(4)</u>	Passed
2	Q6.2 Stopping test	Stopping test should be performed to Q6.2.4 on the entire elevator or simulation such as test bed. The stopping test must meet the following requirements: 2.1 When speed monitoring element acts, speed reducing element shall cause the car to stop, or at least reduce its speed to that for which the counterweight buffer is designed.	Meet the requirements	Passed
		2.2 The means shall not allow the retardation of the empty car in excess of $1 g_n$ during the stop phase.	Max. deceleration: <u>0.532</u> g_n	Passed
		2.3 After its release, the means shall be in condition to operate.	Meet the requirements	Passed
		2.4 After tests, there shall be no fracture, deformation and other changes(for example, cracks , deformation or wear of the gripping elements, appearance of the rubbing surface)	Meet the requirements	Passed
		2.5 For Lift Ascending Car Overspeed Protection Means (speed reducing element) which apply to different weights, the type-test agency shall experiment 4 times respectively with both maximum weight and minimum weight. If it requires adjustment, the agency shall verify the availability of the formula or table provided by the applicant through appropriate approaches (if there is no better way, the median of the two weights can be used for testing), one-time verification is allowed; if adjustment is no required, verification is not necessary. 2.6 For Lift Ascending Car Overspeed Protection Means (speed reducing element) which apply to different speeds, the type-test agency shall experiment 4 times respectively with both maximum speed and minimum speed. If it requires adjustment, the agency shall verify the availability of the formula or table provided by the applicant through appropriate approaches (if there is no better way, the median of the two speeds can be used for testing), one-time verification is allowed; if adjustment is no required, verification is not necessary. 2.7 For Lift Ascending Car Overspeed Protection Means (speed reducing element) which apply to both different weights and different speeds, the type-test agency shall experiment 4 times respectively with maximum weight, maximum speed and minimum weight, minimum speed. If it requires adjustment, the agency shall verify the availability of the formula or table provided by the applicant through appropriate approaches (if there is no better way, the median of the two weights can be used for testing). The verification must perform once at minimum speed and once at maximum speed respectively. if adjustment is no required, verification is not necessary.	Meet the requirements	Passed



**TYPE-EXAMINATION REPORT of
SPECIAL EQUIPMENT
(LIFT)**

Report No. 2021AF1382

Page 4 of 10

No.	item code and name	item contents and requirements	Results	Conclusion
3	Q6.3 External Energy	If the means requires external energy to operate, the absence of energy shall cause the lift to stop and keep it stopped. This does not apply for guided compressed springs.	Energy of the brake part: <u>guided compressed spring</u>	Passed
4	Q6.4 Electric Safety Device	The means shall operate an electric safety device if it is engaged. Note Q-4: When counterweight overspeed governor-safety gear system is adopted, the electrical safety device can be installed on the counterweight overspeed governor. When traction machine brake is taken as speed reducing element of ascending car overspeed protection means, the electrical safety device can be installed on the speed monitoring element.	Meet the requirements	Passed
5	Q6.5 Release	The release of the means shall not require the access to the car or the counterweight.	Meet the requirements	Passed
6	Q6.6 Triggering Mode	If speed reducing element is applied to different trigger modes, it shall take 4 times of trigger action tests of trigger mechanism respectively for other trigger modes. Each test shall have normal and reliable action.	Not applicable	/
7	Q6.7 Reset Mode	If speed reducing element is applied to different reset modes, it shall take 4 times of reset action tests of reset mechanism complementally for other reset modes. Each test shall have normal and reliable action.	Not applicable	/
8	Q6.8 Triggering Force	When mechanical-trigger speed reducing element is acted by triggering, the required trigger force shall be no more than the value given by the test applicant. The test shall be carried out three times, each test shall meet the requirement.	Not applicable	/
9	Q6.9 Triggering Distance	When mechanical-trigger speed reducing element is acted by triggering, the required trigger distance shall be no more than the value given by the test applicant. The test shall be carried out three times, each test shall meet the requirement.	Not applicable	/
10	Q6.10 Nameplate	There should be nameplate on the lift ascending car overspeed protection device, with the information below: (1)Product name, model; (2)Name of manufacturer and manufacturing address; (3)Name or logo of the type-test agency; (4)Allowed system mass range; (5)Allowed rated load system mass range; (6)Triggering speed range; (7)Product No. (8)Manufacture data.	Meet the requirements	Passed
11	Self-monitoring configuration	Two switches (Model: SS-5) run normally on brakers, verifying the validity of triggering and releasing	Meet the requirements	Passed



2. Test Data and Chart

2.1 Test 4 times with the rated speed 0.50m/s, rated load 320kg, system mass 900kg.

Test No.	The maximum tripping speed (m/s)	The average deceleration (gn)	The maximum deceleration (gn)	The braking distance(mm)
1	0.621	0.246	0.357	80
2	0.590	0.247	0.365	72
3	0.634	0.245	0.339	84
4	0.675	0.273	0.381	85

2.2 Test once with the rated speed 0.50m/s, rated load 800kg, system mass 2850kg.

Test No.	The maximum tripping speed (m/s)	The average deceleration (gn)	The maximum deceleration (gn)	The braking distance(mm)
1	0.588	0.309	0.446	57

2.3 Test once with the rated speed 2.0m/s, rated load 800kg, system mass 2850kg.

Test No.	The maximum tripping speed (m/s)	The average deceleration (gn)	The maximum deceleration (gn)	The braking distance(mm)
1	2.704	0.367	0.532	1015


2.4 Test 4 times with the rated speed 2.0m/s, rated load 1275kg, system mass 4800kg.

Test No.	The maximum tripping speed (m/s)	The average deceleration (gn)	The maximum deceleration (gn)	The braking distance(mm)
1	2.635	0.241	0.296	1468
2	2.720	0.242	0.280	1558
3	2.740	0.230	0.292	1664
4	2.713	0.238	0.317	1576

2.5 Stopping Test Curves


(1) Test 4 times with the rated speed 0.50m/s, rated load 320kg, system mass 900kg.

The 1st test

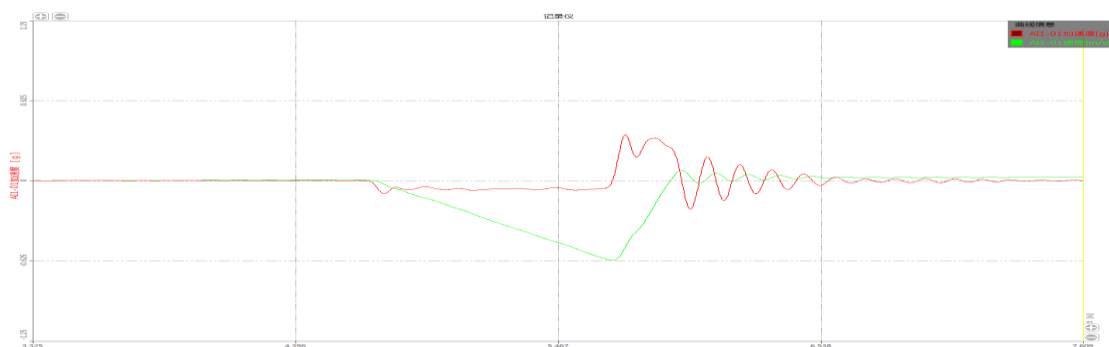





The 2nd test

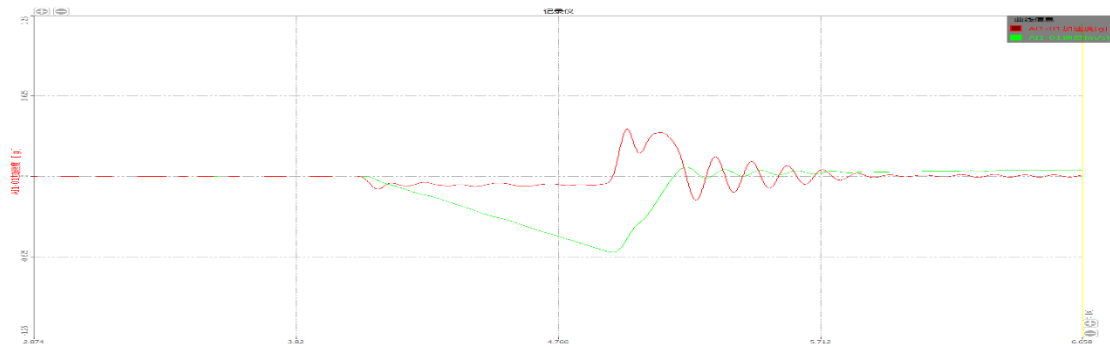


The 3rd test

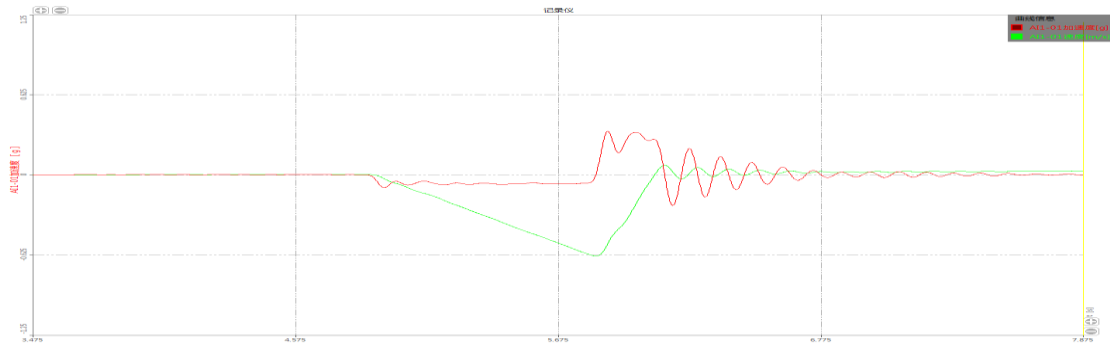

The 4th test

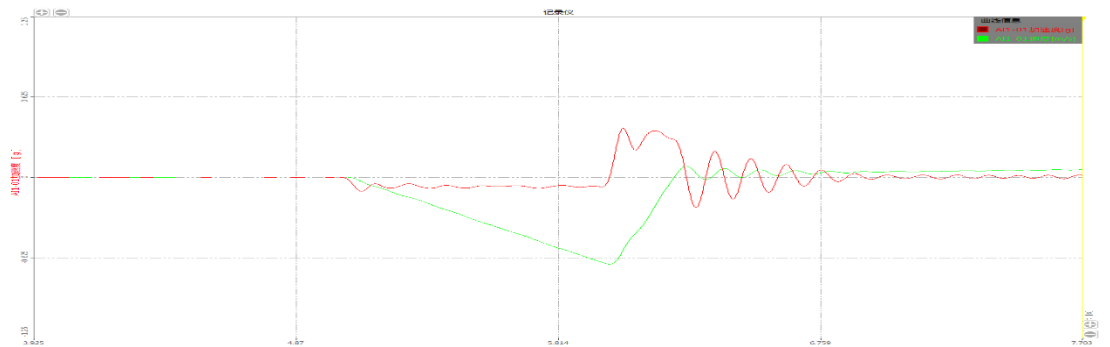


(2) Test once with the rated speed 0.50m/s, rated load 800kg, system mass 2850kg.

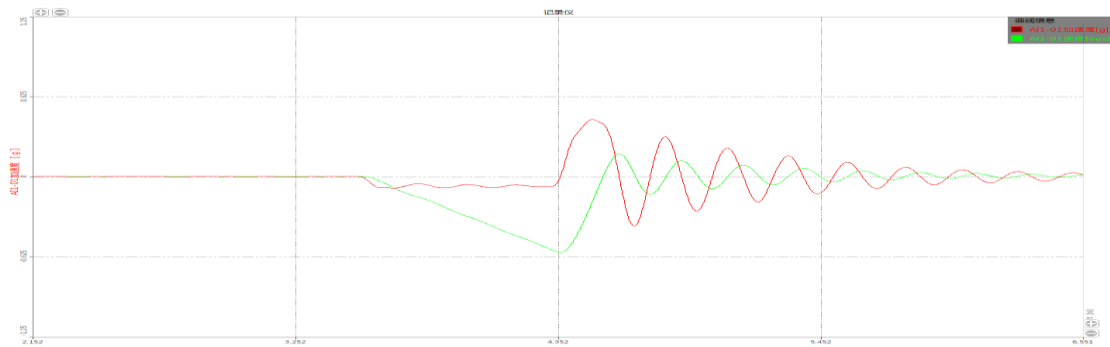




(3) Test once with the rated speed 2.0m/s, rated load 800kg, system mass 2850kg.

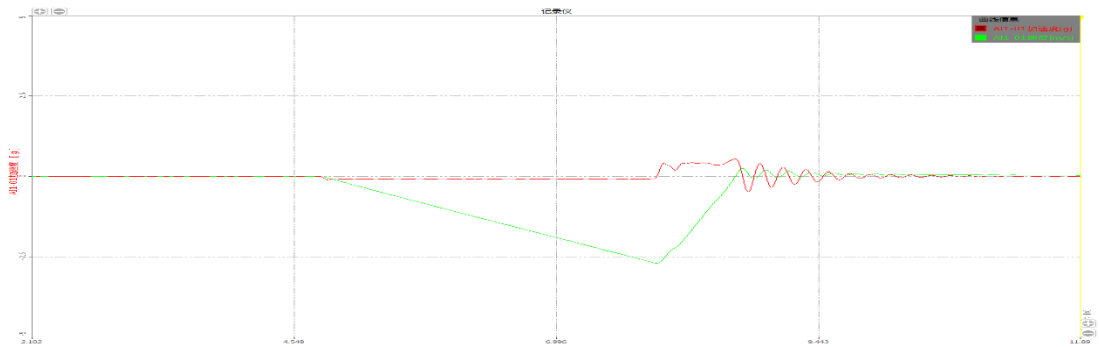


(4) Test 4 times with the rated speed 2.0m/s, rated load 1275kg, system mass 4800kg.


The 1st test

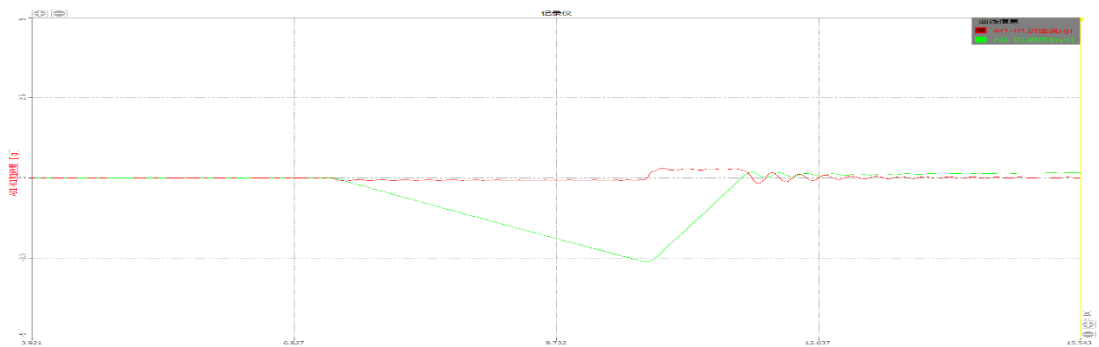


The 2nd test

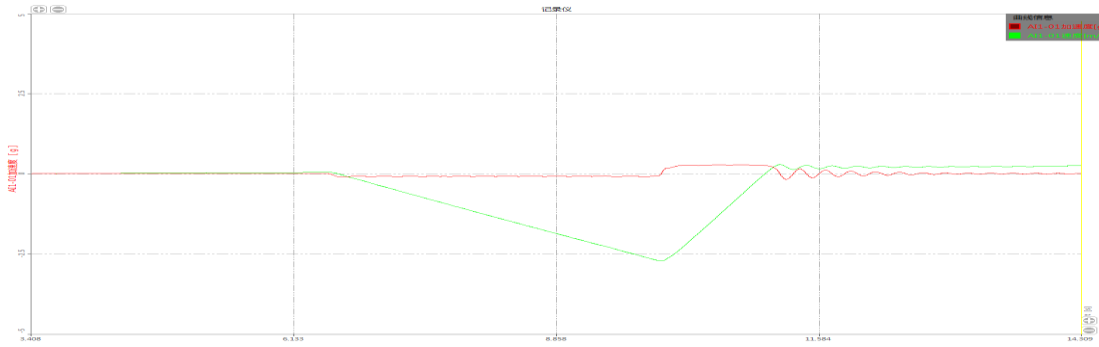

The 3rd test

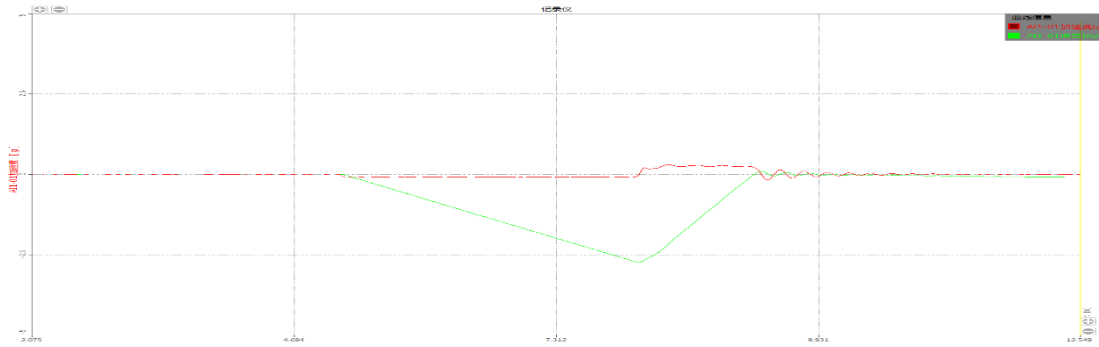


The 4th test

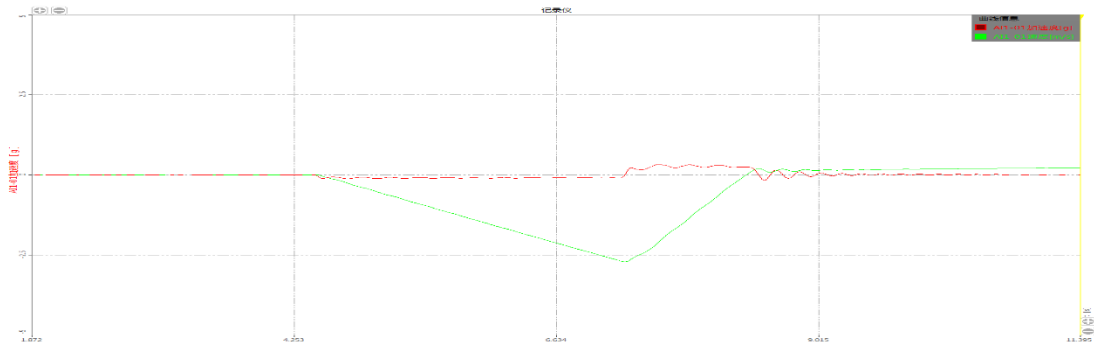

3. Sample Photo and drawing

增补用件说明						制器器
插图						
标题						
附张图号						
签字						
日期						
	姓名	更改文件号	签字	日期		
	设计	标准化			版本	图样标记
	审核	批准			3.2	1:2.5
	工艺	日期			共 1 页	第 1 页

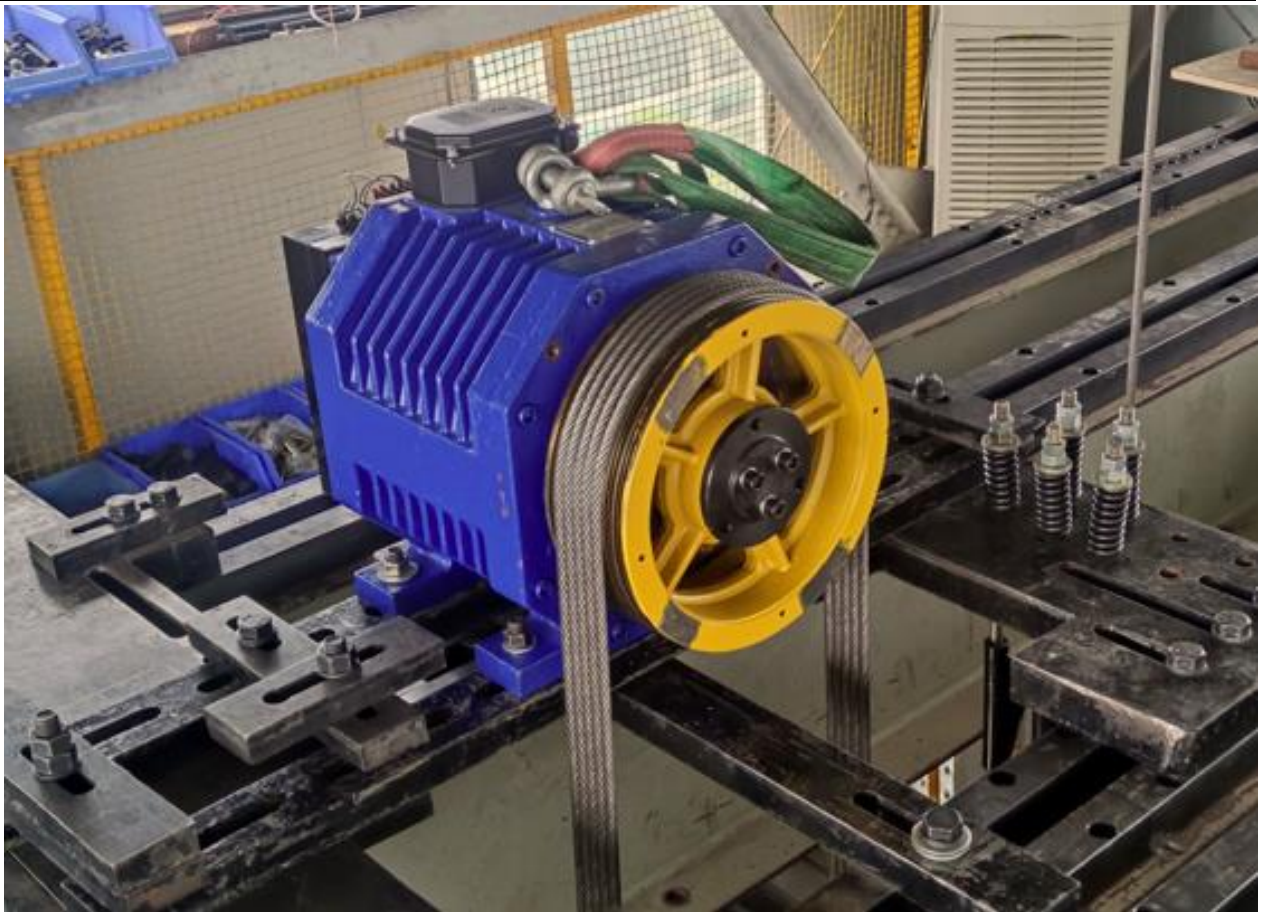

4 .Additional Information

/



4. Changes of The Type-Examination Report

If the name or address of the applicant (or oversea manufacturer) has any change, please submit a change request with related supporting evidence to the previous type-test agency. After confirmation, the agency will indicate the change on the change record page.

The change record see the attached page (If any).

-----The reminder of this page is intentionally left blank-----